



DECA VIBRATOR


Division of DECA Products, Inc.

EXPLOSION PROOF

For hazardous locations. UL approved for Class II Group E, F, and G.
Division 1 and 2 hazardous locations.
4 pole - 1000 Force Lbs. - adjustable



Specifications & Dimensions

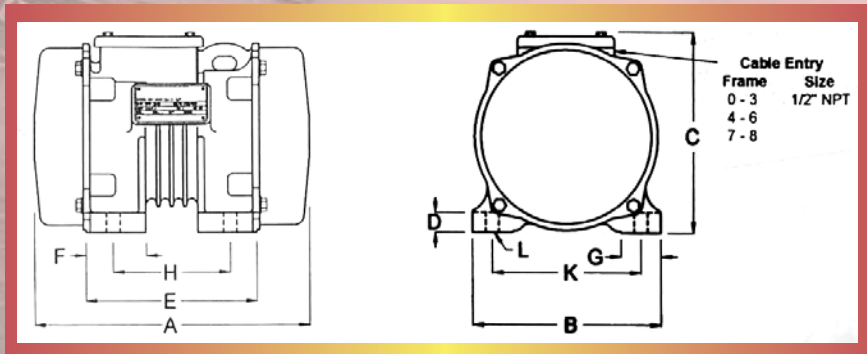

3 Phase 4 Pole 1750 RPM 60 HZ

Model	HP	Force CF Lbs. (1)	Inch Lbs.	Current (2)		Dimensions										
				230V	460V	A	B	C	D	E	F	G	H	K	L	WT.
														Foot Dim.	Bolt	Lbs.
B3X-1000-1A-4	.33	1000	11.50	2.3	1.15	11.8	7.7	8.3	.75	7.25	2.63	1.63	5	6	1/2	44

(1) Force is adjustable from 0 to 100%.

(2) Service Factor is 1.15.

P.O. Box 1286 • Bridgeview, Illinois 60455-0286

(708) 974-9422 • Fax (708) 974-9429

Website: www.decavibrator.com

Email: sales@decavibrator.com